


# Streetmaster Cuff

## cast-on/pre-fixed



## Technical Drawing

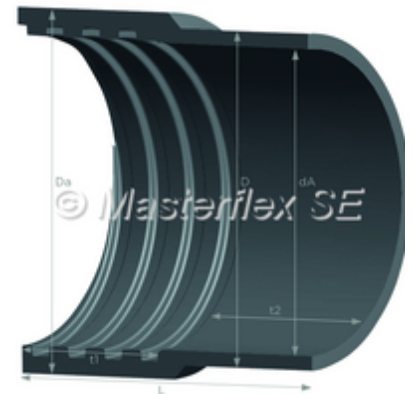

## Material

- wall: polyurethane

## Applications

- cast-on connector cuff for all Streetmaster hoses

## Properties

- abrasion and microbe-resistant
- watertight
- flexible at cold temperatures
- shock-proof

## Temperature Range

- -40°C to +90°C
- peaks to +125°C

Product Variations (\*\*Please replace "x" with your desired hose length.)

DN hose	dA; outer Ø pipe	total length	weight/piece	old article no.	new article no.

	mm	mm	kg		
200	206	125	1	510-200-107	005643
225	226	125	1,15	510-225-107	005667
250	255	125	1,4	510-250-107	005640
280	281	125	1,4	510-280-107	005641
400	404	150	2,35	510-400-107	005645

All data refers to a medium and ambient temperature of +20 °C.

\* Refers to the inner hose lining

Subject to technical changes and colour deviations.

#### Technical Data

DN: diameter hose	dA: outer Ø pipe	D: outer-Ø clamp range	Da: outer-Ø screw range	t1: hose screwing depth	t2: fitting insertion depth	L: total length
200	206	220	220	75	50	125
225	226	240	247	75	50	125
250	255	269	275	75	50	125
280	281	295	302	75	50	125
400	404	418	422	95	55	150

#### Order-Based Production

- Order-specific production in above listed sizes, only in pre-fixed version on Streetmaster hoses