


Combiflex PU Hose Connector

screwable PU hose connector for Master-PUR L and H hoses

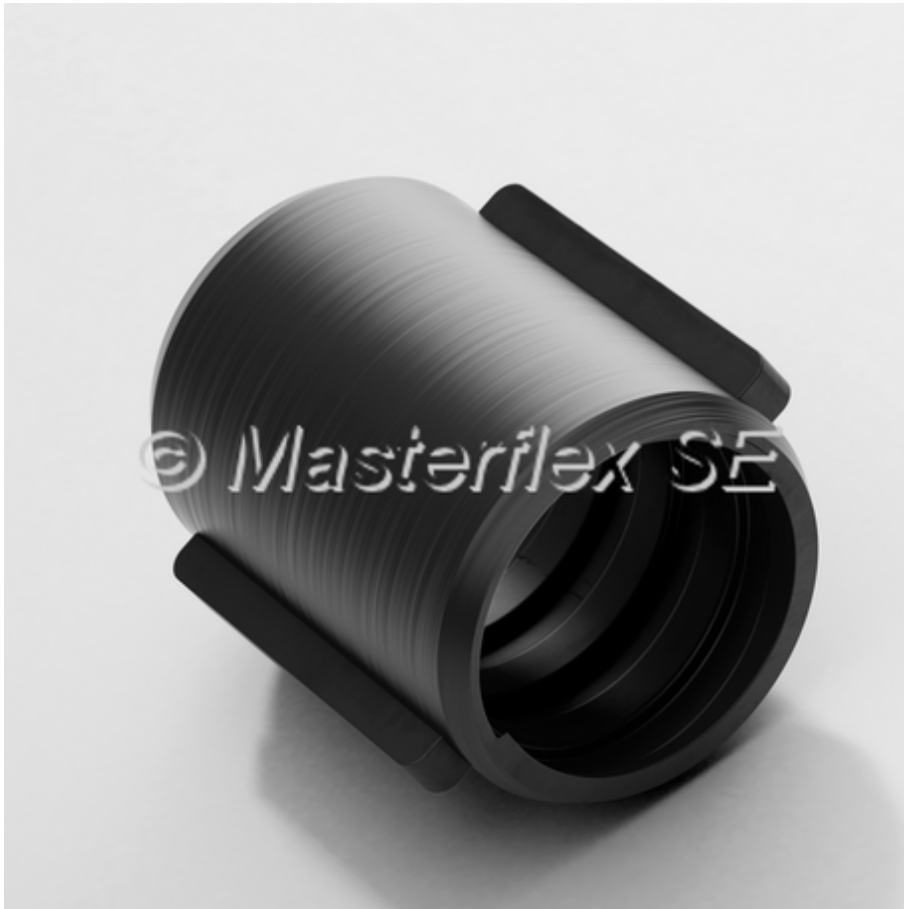

Material

- abrasion resistant polyurethane

Applications

- Screwable hose connector for the hose types Master-PUR L / H / HX

Properties

- lightweight
- high tension-proof and primarily water-tight connection
- reusable and exchangeable
- simple mounting
- abrasion-resistant
- microbe and hydrolysis-resistant
- shock-proof

Temperature Range

- -40°C to +90°C
- peaks to +125°C

Product Variations (**Please replace "x" with your desired hose length.)

DN hose	total length	weight/piece	article no.	new article no.	
	mm	kg			
25	65	0,09	580-025-107	002020	
32	70	0,1	580-032-107	002021	
38	75	0,13	580-038-107	002022	
50	90	0,2	580-050-107	002023	
65	100	0,23	580-065-107	002025	
80	115	0,39	580-080-107	002028	
100	125	0,58	580-100-107	002029	

All data refers to a medium and ambient temperature of +20 °C.

* Refers to the inner hose lining

Subject to technical changes and colour deviations.

Order-specific production

- Order-specific production in the DN sizes listed above